



Electrochemical Hydrogen Sulfide Sensor

H2S-MD-1500



Specifications

Sensitivity Characteristics

Detection Gas	Hydrogen Sulfide
Detection Range	0 ~ 20ppm
Maximum Overload	100ppm
Output Signal	1500 ± 300 nA/ppm
Repeatability	± 2%
Resolution	0.05ppm
Typical Baseline Range (pure air)	± 0.1ppm
Typical Response Time (t90)	< 30seconds
Baseline Shift (-20 ~ 40°C)	< 0.2ppm
Long Term Output Drift	< 2% / month
Expected Life Time	> 2years

Performance data conditions: 20 °C , 50%RH and 1013mBar, using MGK SENSOR recommended circuitry.

Operating Conditions

Operating Temperature	-20 ~ 50°C
Operating Humidity	15 ~ 90% RH
Operating Pressure Range	Atmospheric ± 10%
Recommended Load Resistor	10Ω
Bias Voltage	Not required
Position Sensitivity	None
Recommended Storage Temp.	0 ~ 20°C
Storage Life	6months

Physical Characteristics

Cap Color	Dark Blue
Weight	4.5g (approx.)


Typical Cross Sensitivities

Gas	Concentration (ppm)	Typical Hydrogen Sulfide Concentration (ppm) Equivalent
Hydrogen Sulfide	20	20
Carbon Monoxide	300	1
Carbon Dioxide	5000	0
Hydrogen	1000	4
Sulphur Dioxide	5	0.4
Nitric Oxide	30	0.2
Nitrogen Dioxide	5	-1.5
Ammonia	100	0
Ethanol	1000	0.3

Design Features

- High Sensitivity
- Excellent Selectivity (small sensitivity to CO)
- Linearity
- Stability
- High Reliability
- Perfect Leak-proof Structure

Appearance and Dimensions

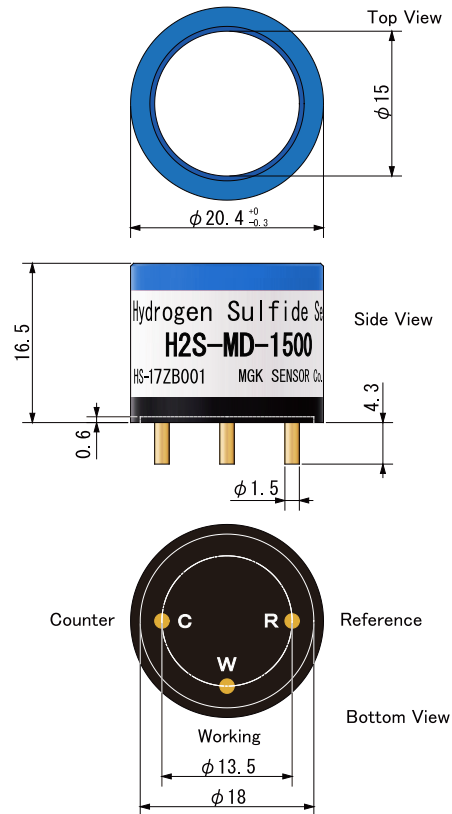

All dimensions in mm
All tolerance ± 0.1 mm unless otherwise stated

NOTE: Do not solder to electrode pins. Use exclusive sockets. Do not blow organic solvents, paints, chemical agents, oils or high concentration gases onto sensor.

NOTE: H2S-MD-1500 DN-2012 Oct. 2017

As the products may be use outside control of MGK SENSOR, the information provided is given without legal responsibility. Customer should test under their own conditions, to ensure that the sensors are suitable for their own requirements. In accordance with the company's policy of continued product improvement, MGK SENSOR reserves the right to make product changes without notice.

